


CONTATORI A TURBINA

- QUANTOMETRI -


- Non fiscali
- Corpo in alluminio
- Installazione in qualsiasi posizione
- Emettitore di impulsi per trasmissione dati



con raccordi

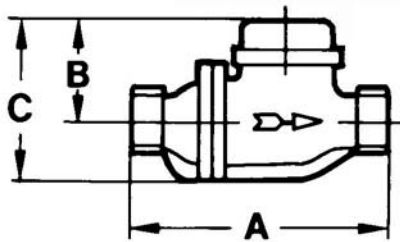

con tiranti



| Tipo | DN | Q _{min.} | Q _{max.} | Esec | 1) PN 2) | | Attacchi | Dimensioni (mm) | | | | | Peso | |
|------|-----|-------------------|-------------------|------|----------|-----|---------------------------|-----------------|---------|-----|-----|-----|------|---------|
| | | | | | bar | bar | | A | B | C | D | E | | kg |
| QA | mm | m ³ /h | m ³ /h | | bar | bar | Filettati esterni G 1" | A | B | C | D | E | kg | |
| | | | | | | | | | | | | | | 10 |
| | | | | G II | 10 | 40 | | 5,2 | 5.03.03 | | | | | |
| 16 | 25 | 2,5 | 25 | G I | 4 | 16 | | 185 | 90 | 132 | — | — | 1 | 5.03.04 |
| | | | | | | | | | | | | | | |
| 25 | 25 | 4 | 40 | G I | 4 | 16 | | 185 | 90 | 132 | — | — | 1 | 5.03.05 |
| | | | | | | | | | | | | | | |
| 40 | 25 | 4 | 65 | G I | 4 | 16 | | 185 | 90 | 132 | — | — | 1 | 5.03.06 |
| | | | | | | | | | | | | | | |
| 65 | 50 | 6 | 100 | Z | 4 | 16 | | Sandwich | 60 | 135 | — | 102 | — | 1,3 |
| 100 | 80 | 10 | 160 | F | 4 | 16 | 120 | | 165 | — | 138 | 200 | 5 | 5.03.08 |
| 160 | 80 | 16 | 250 | F | 4 | 16 | 120 | | 165 | — | 138 | 200 | 5 | 5.03.09 |
| 250 | 100 | 25 | 400 | F | 4 | 16 | 150 | | 175 | — | 158 | 200 | 7,5 | 5.03.10 |
| | | | | | | | | | | | | | | |

Cod. E

¹ Pressione d'esercizio max per gas combustibili

² Pressione d'esercizio max per gas non combustibili (p. es. : aria)