

# MANICHETTE GPL

## LPG FLEXIBLE HOSE



Pressione esercizio max. 18 bar  
*Max. working pressure*


Pressione collaudo 100 bar  
*Test pressure*

Materiale : Tubo Robur

L = 5 mt.

Completi di flange saldate  
*Complete of welded flanges*

TIPO	Cod.
1	1.91.20
1 1/4	1.91.21
1 1/2	1.91.22
2	1.91.23
3	1.91.24

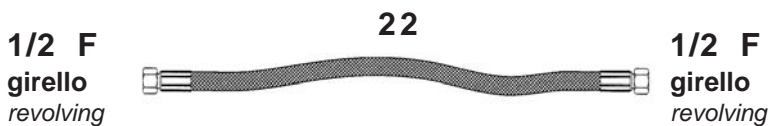

Cod.

L = 1 mt	1.91.04
L = 1,5 mt	1.91.05
L = 3 mt	1.91.06
L = 5 mt	1.91.07
L = 10 mt	1.91.08

RACCORDI ACME F per tubo



TIPO

- 1
- 1 1/4
- 1 1/2
- 2
- 3

VALVOLE ANTISTRAPPO

TIPO Cod.

1 1/2

2



**BRACCI DI CARICO**

**LPG LOADING ARMS**

**BRAS DE CHARGMENT  
 POUR GPL**

