


# GIUNTI ANTIVIBRANTI

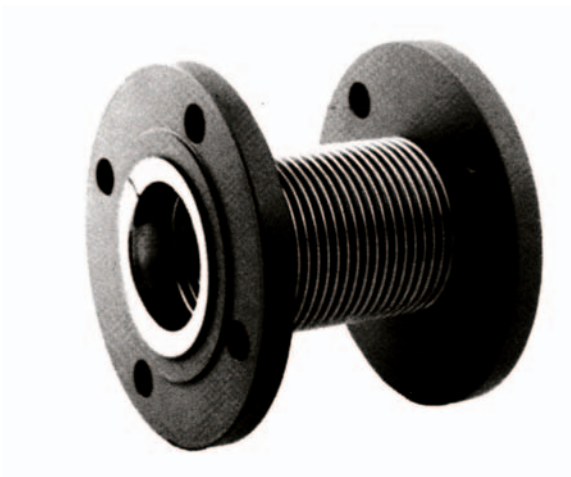

## DATI TECNICI

max. temperatur. : 300 °C 300 °C

pressione max.: 1 bar 6 bar

attacchi : filettati gas flangiati  
Conici PN 16

Attacchi filettati (R")	Pressione di collaudo bar	Deformazione Massima				Lunghezza di ingombro L mm
		Assiale		angolare $\alpha \pm$ [°]	laterale $e \pm$ mm	
		h totale mm	h $\pm$ mm			
1/2"	1,5	24	12	50	5	170
3/4"	1,5	30	15	50	8	175
1"	1,5	40	20	50	10	185
1 1/4"	1,5	50	25	50	14	200
1 1/2"	1,5	50	25	45	14	210
2"	1,5	50	25	30	12	240

**Cod.**

**6.16.01**

**6.16.02**

**6.16.03**

**6.16.04**

**6.16.05**

**6.16.06**

DN	Deformazione Massima					Lunghezza di ingombro L <sub>1</sub> mm	Flangiatura PN16					
	Assiale		angolare $\alpha \pm$ [°]	laterale $e \pm$ mm	in tutte le direzioni mm		$\varnothing A$ mm	$\varnothing F$ mm	b mm	$\varnothing LKr$ mm	$\varnothing I$ mm	N° Fori
	totale h mm	h $\pm$ mm										
50	45	22,5	25	11	1,0	150	75	165	16	125	18	4
65	45	22,5	25	11	1,0	155	90	185	16	145	18	4
80	45	22,5	20	10	0,9	165	110	200	18	160	18	8
100	45	22,5	20	10	0,9	170	133	220	18	180	18	8

**Cod.**

**6.16.08**

**6.16.09**

**6.16.10**

**6.16.11**

